


## Sealing Pressure Adjustment:

Changing the sealing pressure within the upstand dimension plus  $\frac{1}{64}$  in. (0.5 mm) reserve on both sides.



## Horizontal Adjustment:

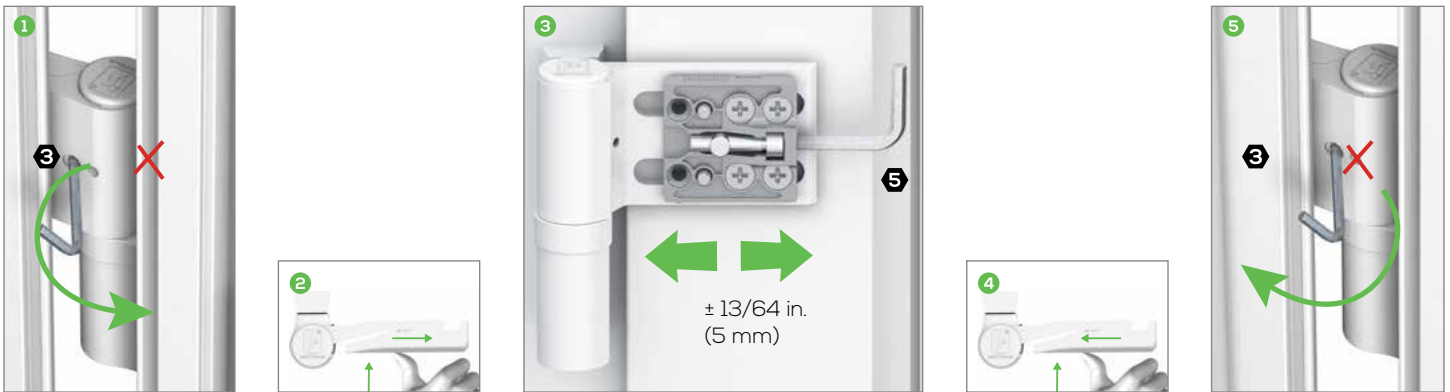

## Height Adjustment:

Bearing bushes made of maintenance-free PVC containing Teflon — **do not lubricate!**

